


## PVC 130 Hartschaum

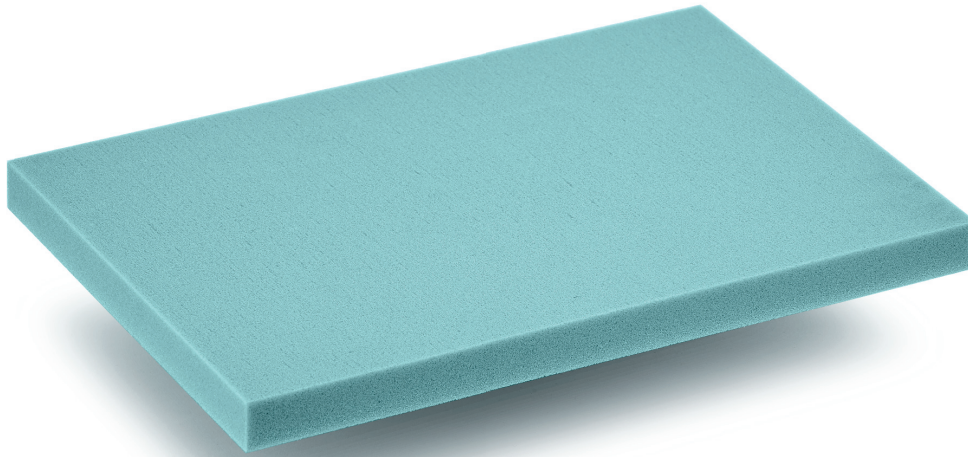

Dichte kg/m <sup>3</sup>	ASTM D1622	kg/m <sup>3</sup>	nominal	130
Druckbelastbarkeit	ASTM D1621-10	MPa	average min-ave min-min	2,73 2,52 2,25
Druckbelastungsmodul	ASTM D1621-10	MPa	average min-ave min-min	125 111 99
Bruchwiderstand	ASTM D1623	MPa	average min-ave min-min	3,81 3,04 2,79
Bruchmodul	ASTM D1623	MPa	average min-ave min-min	216 185 170
Scherfestigkeit	ASTM C273	MPa	average min-ave min-min	2,03 1,97 1,79
Schermodul	ASTM C273	MPa	average min-ave min-min	49 45 41
Scherbruchdehnung	ASTM C273	%	average	32
Standard Formate		mm		850 1900 58